

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification<sup>6</sup> :

E21B 43/40

A1

(11) International Publication Number:

WO 00/03118

(43) International Publication Date:

20 January 2000 (20.01.00)

(21) International Application Number:

PCT/NO99/00232

(22) International Filing Date:

9 July 1999 (09.07.99)

(30) Priority Data:

19983211

13 July 1998 (13.07.98)

NO

(71) Applicant (for all designated States except US): READ GROUP  
A/S [NO/NO]; Ravnsborgveien 56, N-1395 Hvalstad (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): KJOS, Tore [NO/NO];  
Holsteinveien 3, N-0874 Oslo (NO).(74) Agent: REISTAD, Gunnar, O.; Bryns Patentkontor A/S, P.O.  
Box 765, Sentrum, N-0106 Oslo (NO).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

## Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: A METHOD AND APPARATUS FOR PRODUCING AN OIL RESERVOIR

## (57) Abstract

A method of producing an oil reservoir, comprising establishing an oil producing well, producing a production fluid containing oil and water, transporting said production fluid to a downhole liquid/liquid hydrocyclone, separating the production fluid in the liquid/liquid hydrocyclone into an oil enriched stream at the hydrocyclone overflow, and a water enriched stream at the hydrocyclone underflow, transporting the oil enriched stream to the surface, reinjecting the water enriched stream at a downhole site, cooling the transported oil enriched stream by sending a counterflow of a cooling medium relative said oil enriched stream, thereby keeping the oil enriched stream in a substantially liquid phase.

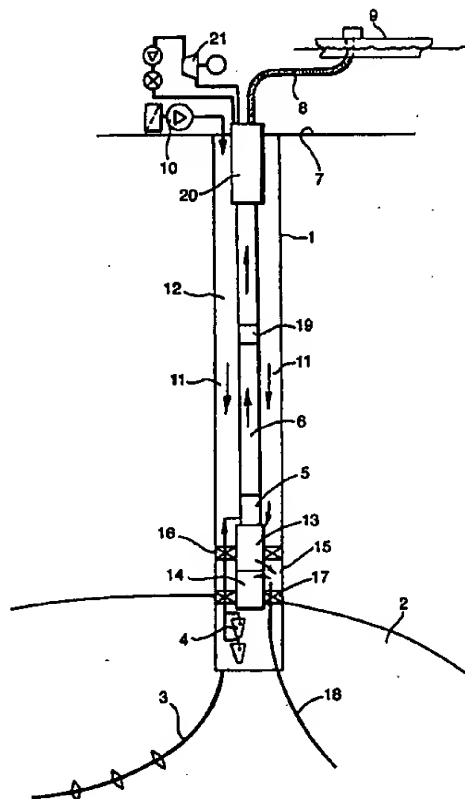

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## A METHOD AND APPARATUS FOR PRODUCING AN OIL RESERVOIR

5 The present invention relates to a method and an apparatus for producing an oil reservoir. The invention is developed in connection with the demand and need for production of deeper localized and mostly relatively small oil reservoirs. When producing such oil reservoirs it is regularly necessary to inject water in the resevoir thereby forcing out the hydrocarbons from the reservoir.

10 Increasingly, oil producers are looking for ways to produce oil from wells in which the production fluid has a high water cut efficiently enough to make the cost of production economic. One known method is to separate the production fluid in a downhole separator comprising one or a series of hydrocyclones in order to provide initial separation of at least  
15 some of the water from the production fluid to reduce the quantity of production fluid which needs to be transported to the surface. The separated water is re-injected, to the oil reservoir or another site.

According to the present invention a method for producing an oil reservoir is provided,  
20 comprising establishing an oil producing well,  
producing a production fluid containing oil and water,  
transporting the production fluid to a downhole liquid/liquid hydrocyclone,  
separating the production fluid in the liquid/liquid hydrocyclone into an oil enriched stream at the hydrocyclone overflow, and a water enriched stream at the hydrocyclone underflow,  
25 transporting the oil enriched stream to the surface,  
re-injecting the water enriched stream at a downhole site, and  
cooling the transported oil enriched stream by sending a counterflow of a cooling medium relative the oil enriched stream, thereby keeping the oil enriched stream in a substantially liquid phase.

30 By cooling the ascending oil enriched stream the stream liquid phase is kept as long as possible, thereby substantially avoiding gas formation.

When producing a reservoir containing volatile oils the production fluid will be subject to a  
35 volatilisation caused by a pressure reduction upwards in the well. A cooling of the upwards flowing stream in the well will cause a temperature reduction balancing the pressure reduction, whereby the condensation curve in the corresponding phase diagram is not crossed. Thus gas will not evolve and a multy phase situation is avoided. The result is a preventiv

liquidation in that the stream is hindered in giving away the volatile heat and will remain in the same phase, that is the liquid phase. Some of the most volatile components will of course evolve and remain in the gaseous phase but it is estimated that the bulk of the gas phase will not evolve but remain in the liquid.

5 The counterflow may advantageously be used as the driving medium for a pump transporting the oil enriched stream.

10 The cooling medium may preferably include injection water, delivered from a water pump at or above the surface.

15 Provided the cooling is not sufficient to avoid a disturbing gas phase the oil enriched stream can be pressurized in one or more additional downhole pumps positioned in the well above the transportation pump. Thereafter the stream is cooled further, striving to keep the stream outside the condensation line in the phase diagram.

20 The cooling medium may include re-injection water provided from an aquifer, i.e. an underground site containing water. Water drawn from an aquifer is preferably separated in a downhole solid/liquid hydrocyclone, whereby the separated water is re-injected in the producing reservoir and the solids are re-injected in the ground, for instance in the aquifer.

25 The present invention also provides an apparatus for producing an oil reservoir, the apparatus comprising a downhole liquid/liquid hydrocyclone for separating production fluid containing oil and water into an oil enriched stream and a water enriched stream, a downhole pump for pumping the oil enriched stream to the surface, and means for sending a counterflow of cooling medium relative the oil enriched stream.

30 The means for sending the counterflow may preferably include a means for sending a flow of injection water down the well.

Preferably the downhole transporting pump may be in driven connection with a downhole injection water driven turbine.

35 Also a re-injection water pump may preferably be in driven connection with said downhole turbine.

As disclosed above in connection with the inventive method the apparatus will preferably include one or more additional downhole pumps for transport (pressurizing) of the cooled oil enriched stream .

- 5 The apparatus may further include a downhole solid/liquid hydrocyclone in the well at a position above the downhole transport pump, said hydrocyclone being flow coupled to an aquifer by means of a pump and having an overflow delivering separated water down to the oil producing reservoir, and an underflow delivering separated solids to an underground site.

- 10 The invention will now be described with reference to the drawings, in which:

Fig. 1 is a schematic diagram of an apparatus according to the invention,

Fig. 2 is a schematic diagram of another apparatus according to the invention, and

15

Fig. 3 is a schematic phase diagram illustrating the basic inventive idea.

As shown in fig. 1, a well penetrates into a production formation 2. A deviation well 3 is used for the production of oil from the formation or reservoir 2. A production flow from the well 3  
20 is transported to a series of liquid/liquid downhole hydrocyclones 4 where the production flow is separated in an oil enriched stream from the overflows and a water enriched stream from the underflows. A downhole pump 5 provides for the transport of the oil enriched stream up to the surface (here a sea bottom) through a flow tube 6. At the surface 7 the oil enriched stream goes through a flexible riser 8 to a production vessel 9.

25

Injection water provided by an injection pump 10 at the surface 7 is forced down the well 1 in the annulus 12 between the flow tube 6 and the surrounding well wall, as indicated with the arrows 11.

- 30 The transport pump 5 is part of a downhole unit consisting of the pump 5, a water driven turbine 13 and an injection water pump 14, both pumps 5 and 14 being in drive connection with the turbine 13. The water pump 14 takes separated water from the hydrocyclones 4 and deliver it to the space 15, delimited by the two packers 16 and 17 in the well 1. From this space 15 the water is re-injected through the injection line 18 which penetrates into the  
35 formation 2.

The injection water from the surface pump 10 is used as a drive medium for the turbine 13 and is expelled into the space 15, wherefrom it is injected through the injection line 18.

The injection water which flows down the annulus 12 is used as a cooling medium for the oil enriched stream flowing upwards through the tube 6.

- 5 In the tube 6 there is indicated an additional stream pump which is used for pressurizing the oil enriched stream.

Additional cooling may be added by means of a cooler 20 which is served by a refrigeration plant 21, for instance using Freon as refrigerating medium. It is not shown but the cooler 20  
10 may preferably be of a type having a double jacket where the refrigerating medium flows down countercurrently to the ascending oil enriched stream and then flows back up radially outside the descending flow.

Fig. 2 depicts schematically a possible apparatus including a downhole re-injection pump 22,  
15 the inlet of which being connected to an aquifer 23 ( a water containing formation) and the outlet of which being connected to the inlet of a downhole solid/liquid hydrocyclone 24. In this hydrocyclone 24 the water from the aquifer is separated in solids, which flows from the underflow and back to the formation 23, and re-injection water which flows down for re-injection in the oil producing formation 2. As in fig. 1 a production flow goes from the  
20 formation 2 to downhole hydrocyclones 4 where the production fluid is separated as disclosed above in connection with the apparatus in fig. 1. The cooling of the oil enriched stream which is transported up through the line 6 (transport pump 5 omitted in fig. 2) is not disclosed in fig. 2.

- 25 The object of fig. 2 is to disclose the possible inclusion of the re-injection unit 22, 24 and to show a possible adding of chemicals to the re-injection water through a supply line. Such chemicals may be viscosity reducing additives etc. Such chemicals may be added to the oil enriched stream in the tube or line 6 but the adding as shown to the re-injection waters bears the advantage that the chemicals will remain underground because they are recirculated in the  
30 system in an environmental friendly manner.

The basic inventive idea is shown in fig.3, which is a schematical phase diagram for the oil. In the pT diagram the point 1 may be taken as a starting point. A pressure reduction would result in a moving to point 5 in the phase diagram, with corresponding formation of a gas  
35 phase, say 40 % gas and 60% oil. By cooling the stream means following the line to the point 2, i.e. at or above the condensation line c, and further down to point 4. At point 2 a pressurizing in the additional pump 19 (conf.fig 1) will lift the position in the diagram to

point 3, wherefrom a further cooling will result in point 6 on the condensation line , instead of point 4, as indicated in fig. 3.

The effective cooling area and the mean temperature difference are favourable in the system according to the invention. The cooling area in a 3000 meter deep well will for instance be around 1000 square meters given a 4" tube , and the mean temperature difference will be up to 50 degrees C , which will represent an adequate cooling effect.



Patent claims

1.

A method of producing an oil reservoir, comprising

establishing an oil producing well,

producing a production fluid containing oil and water,

transporting said production fluid to a downhole liquid/liquid hydrocyclone,

separating the production fluid in the liquid/liquid hydrocyclone into an oil enriched stream at the hydrocyclone overflow, and a water enriched stream at the hydrocyclone underflow,

transporting the oil enriched stream to the surface,

reinjecting the water enriched stream at a downhole site,

cooling the transported oil enriched stream by sending a counterflow of a cooling medium relative said oil enriched stream, thereby

keeping the oil enriched stream in a substantially liquid phase.

2.

A method as in claim 1, using said counterflow of cooling medium as a driving medium for a pump transporting said oil enriched stream.

3.

A method as in claim 1 or 2, said cooling medium including injection water.

4.

A method as in claim 1, 2 or 3, adding additional transportation energy to the oil enriched stream, thereby keeping the cooled oil enriched stream in a substantially liquid phase.

5.

A method as in any of the preceeding claims, said cooling medium including re-injection water provided from an aquifer.

6.

An apparatus for producing an oil reservoir through an oil producing well, the apparatus comprising a downhole liquid/liquid hydrocyclone for separating a production fluid containing oil and water into an oil enriched stream and a water enriched stream, a downhole  
5 pump for pumping said oil enriched stream to the surface, and means for sending a counterflow of a cooling medium relative said towards the surface pumped oil enriched stream.

7.

10 An apparatus as in claim 6, said means for sending said counterflow including a means for sending a flow of injection water down said well.

8.

15 An apparatus as in claim 7, including a downhole turbine driven by the injection water, said turbine being in drive connection with said downhole pump.

9.

An apparatus as in claim 8, including a downhole re-injection water pump in drive connection with said downhole turbine.

20

10.

An apparatus as in claim 9, including an additional downhole pump for transport of said cooled oil enriched stream to the surface, said additional pump being arranged in said well at a position between the said downhole pump and the surface.


25

11.

An apparatus as in any of the claims 6-10, including a downhole solid/liquid hydrocyclone in the well at a position above said downhole pump, said downhole solid/liquid hydrocyclone having an inlet, an overflow and an underflow, said inlet being connected with an aquifer,  
30 said overflow ejecting re-injection water down the well to the reservoir, and said underflow ejecting solids enriched liquid to a downhole site, preferably to said aquifer.


1/3

Fig. 1.

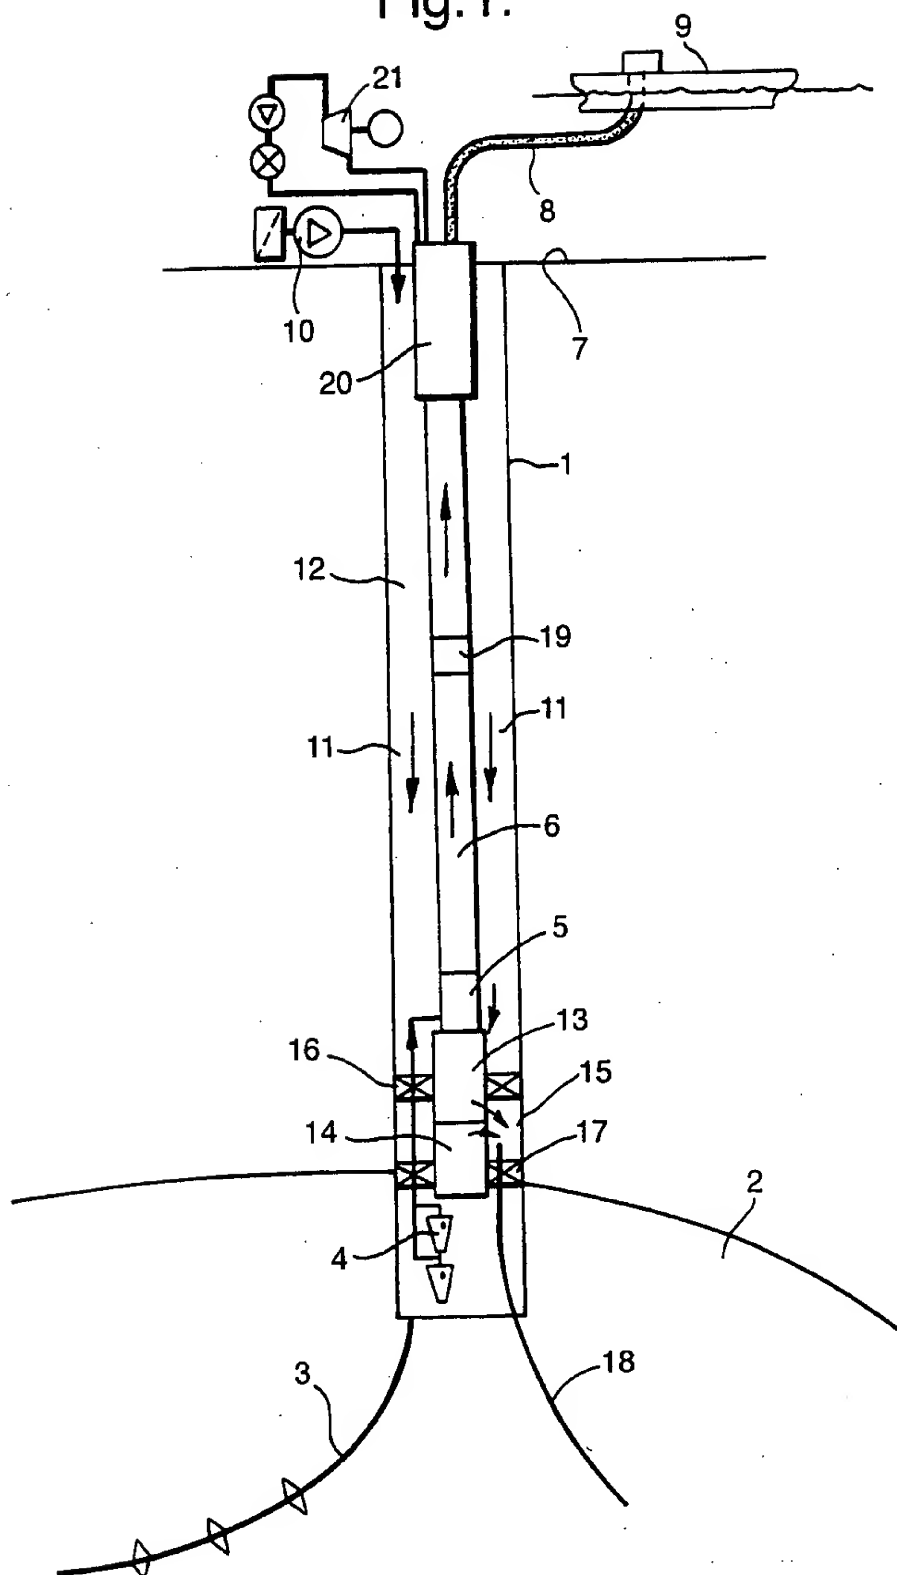


2/3

Fig.2.

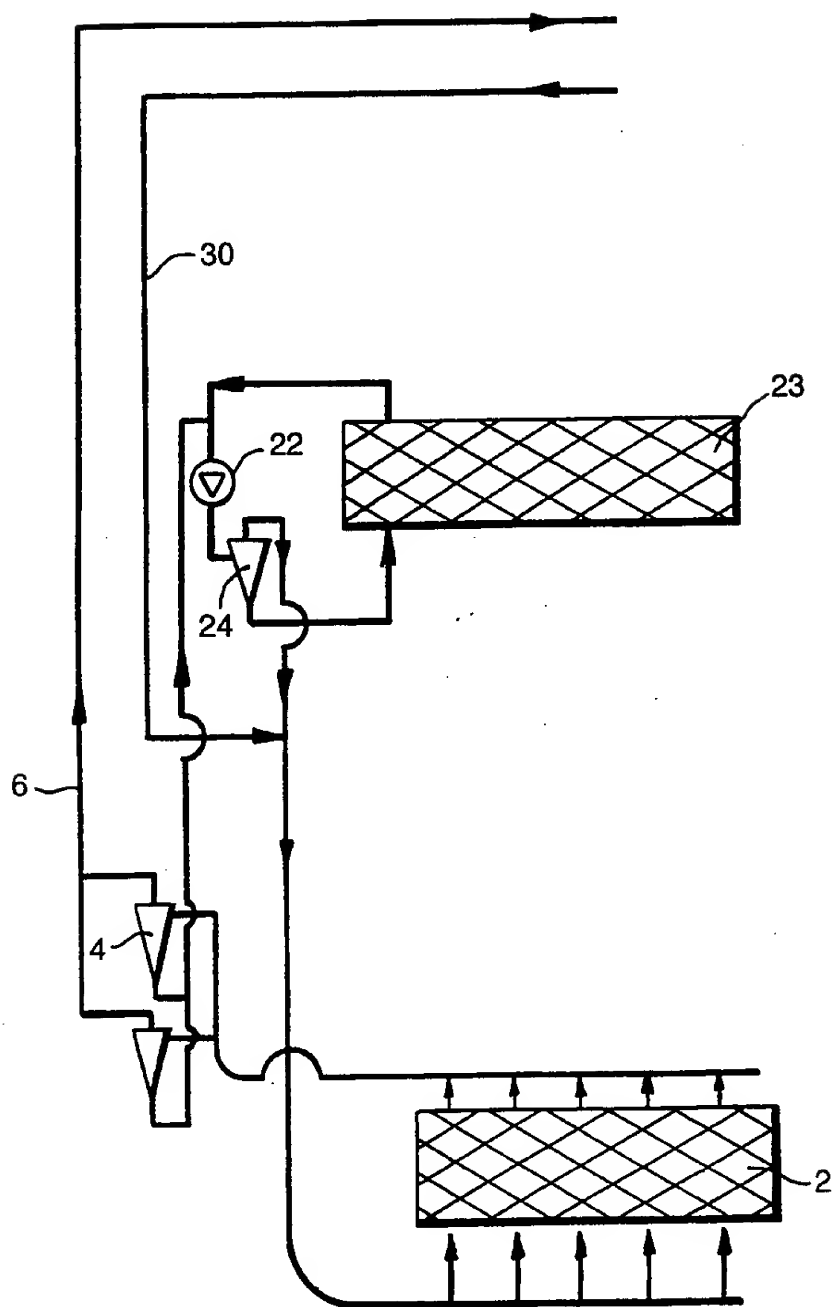

**Fig. 3.**

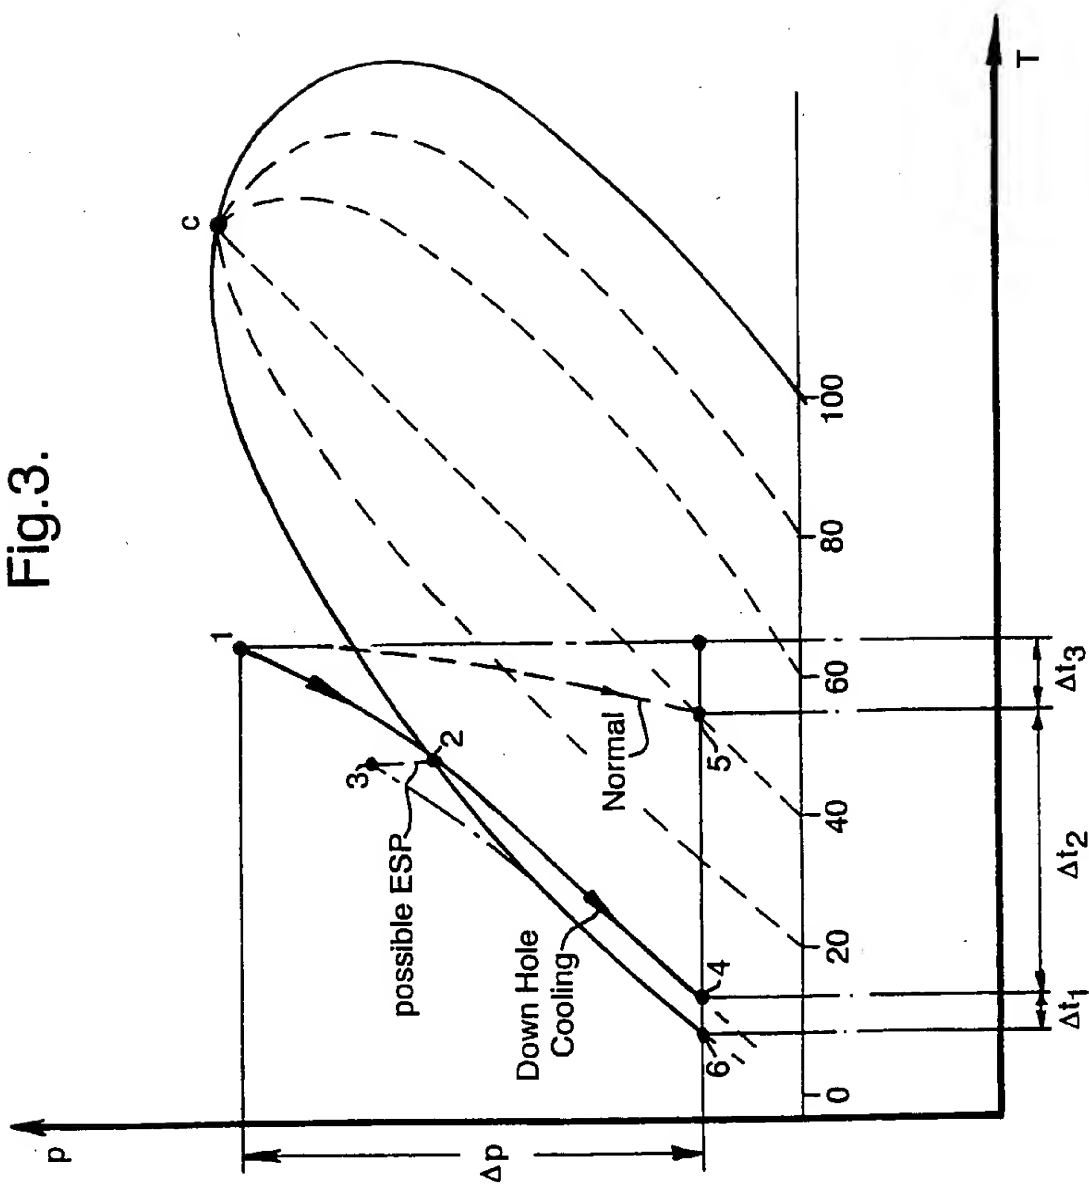

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 99/00232

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: E21B 43/40

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9413930 A1 (READ PROCESS ENGINEERING A/S), 23 June 1994 (23.06.94) --	1-11
A	WO 9711254 A1 (BAKER HUGHES LIMITED), 27 March 1997 (27.03.97) --	1-11
A	WO 9725150 A1 (BAKER HUGHES LIMITED), 17 July 1997 (17.07.97) --	1-11
A	US 4738779 A (N. CARROLL ET AL), 19 April 1988 (19.04.88) -- -----	1-11

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

29 October 1999

Date of mailing of the international search report

2 December 1999 (02.12.99)

Name and mailing address of the ISA

Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Christer Bäcknert / MR  
Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NO 99/00232

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9413930 A1	23/06/94	AU 5721194 A	04/07/94
		CA 2152070 A	23/06/94
		EP 0715678 A	12/06/96
		NO 924896 A	20/06/94
		NO 952414 A	16/06/95
		US 5711374 A	27/01/98
WO 9711254 A1	27/03/97	AU 697376 B	01/10/98
		AU 6939896 A	09/04/97
		CA 2231543 A	27/03/97
		EP 0851968 A	08/07/98
		GB 9519339 D	00/00/00
		NO 981287 A	20/03/98
WO 9725150 A1	17/07/97	AU 1392197 A	01/08/97
		AU 5010596 A	08/10/96
		EP 0815616 A	07/01/98
		EP 0874694 A,B	04/11/98
		GB 2308995 A,B	16/07/97
		GB 9600600 D	00/00/00
US 4738779 A	19/04/88	NO 983185 A	11/09/98
		AT 60721 T	15/02/91
		AU 593228 B	08/02/90
		AU 5191786 A	18/06/86
		BR 8507291 A	27/10/87
		CA 1262531 A	31/10/89
		EG 17602 A	30/03/90
		EP 0238491 A,B	30/09/87
		GB 2191120 A,B	09/12/87
		MX 167588 B	31/03/93
		NL 8520398 T	03/08/87
		OA 8602 A	30/11/88
		WO 8603143 A	05/06/86